



INTERROW CULTIVATOR WITH SPRING TINE, FOLDABLE

KCM

The Interrow Cultivator is mounted from tractor's hydraulic lifting unit and universal three point linkage system. Therefore transportation to the field can be easily done.

Foldable Interrow Cultivator is produced as 5-7-9-11 rows for hoeing of plants. The machine is used for rising of soil and weeding control during growing period of plants.

Machine is entirely designed for being easily adjusted, dismantled or to change new elements. Space between rows is adjustable and fertilizing mechanism can be added according to demand.



Interrow Cultivator equipped with guide disc that guide the interrow cultivator in such a way so that it maintains the direction of travel even at a higher speed and even in rough terrain.



Optional fertilizing mechanism can be added according to demand.



Interrow cultivators are equipped with foldable wings that can be folded in transport position within 2.5m.

Contact:

2.Org.San.Böl. Evrenköy Cad. No: 32 42050 Selçuklu Konya / TÜRKİYE

Tel. +90 332 235 64 23 - 24 Fax +90 332 233 75 81


agromaster@agromaster.com | www.agromaster.com



INTERROW CULTIVATOR WITH SPRING TINE, FOLDABLE

KCM

Star disc prevent covering of small plants with soil during the hoeing. Working depth of each unit can be adjusted according to the plant size. Independent moving units keep the working depth stabile on the rough fields. Guide disc prevent deviating of machine and also provide to hoe the plant without damage on inclined fields. You can reach the better result with hoeing process instead of using agricultural chemical.

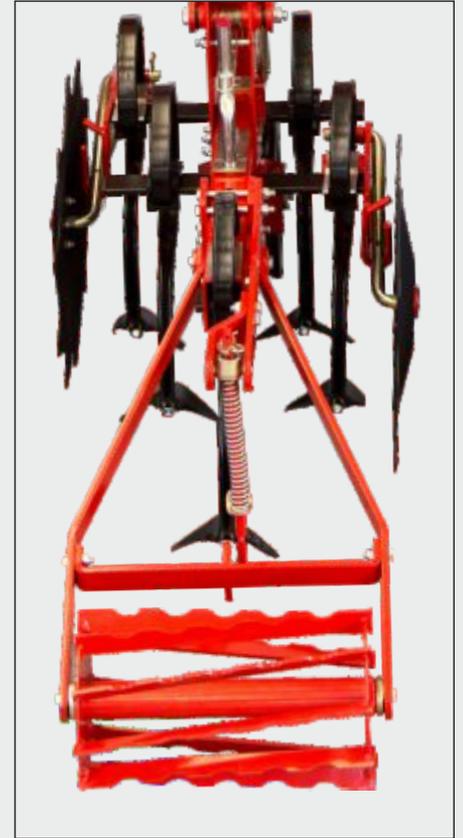

The spacing between the individual working units can be changed easily by loosening the screws that connect the main frame of the machine with the working units.

| Technical Specification* | Units | KCM 5 | KCM 7 | KCM 9 |
|----------------------------|-------|------------|------------|------------|
| Number of Units | pcs | 5 | 7 | 9 |
| Number of Tines | pcs | 25 | 35 | 45 |
| Total Width (W) | mm | 3850 | 5240 | 5240 |
| Total Length (L) | mm | 2700 | 2700 | 2700 |
| Total Height (H) | mm | 1830 | 1830 | 1830 |
| Working Width | mm | adjustable | adjustable | adjustable |
| Transport Width | mm | 2500 | 2500 | 3200 |
| Transport Height | mm | 2150 | 2900 | 3600 |
| Space Between Units | mm | 450-750 | 450-750 | 450-750 |
| Fertilizer Hopper Capacity | | 790 | 790 | 950 |
| Tyre Size | hp | 6.50/80-15 | 6.50/80-15 | 6.50/80-15 |
| Required Power | kg | 70 | 90 | 110 |
| Total Weight | | 1260 | 1440 | 1620 |

* Manufacturer reserves rights to change them without notice.



The rear roller provide to crumbling the soil and smooth soil surface.

Contact:

2.Org.San.Böl. Evrenköy Cad. No: 32 42050 Selçuklu Konya / TURKIYE

Tel. +90 332 235 64 23 - 24 Fax +90 332 233 75 81

agromaster@agromaster.com | www.agromaster.com